


MODELLI CON TRAMOGGIA SOPRA PRESSA
MODELS WITH HOPPER ABOVE MACHINE

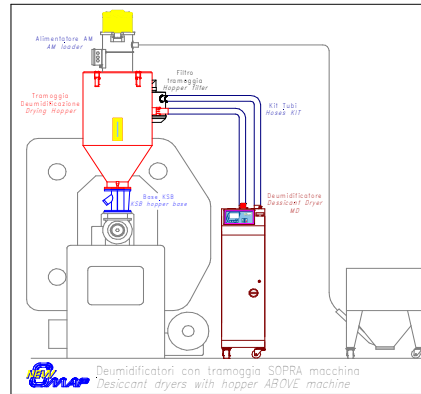



3-01 **Sistema deumidificatore bitorre MD MT (70÷140°C) + tramoggia con base sopra pressa**
System with twin-tower MD MT (70÷140°C) dryer + hopper with base above machine

Modello Model	Portata aria Airflow	Dew Point Dew Point	Proc./Rigen. Risc. Proc./Regen. Heating	Tensione/Frequenza Voltage/Frequency	Volume tramoggia Hopper volume	Diametro tubi aria Air hoses diameter	Base con serranda Base with slide gate
MD80 MT - 50	80 m ³ /h	-45°C	3,0/1,5 kW	400V/3+N/50Hz	50 dm ³	3+3 m, D. 50 mm	KSB1
MD80 MT - 75	80 m ³ /h	-45°C	3,0/1,5 kW	400V/3+N/50Hz	75 dm ³	3+3 m, D. 50 mm	KSB1
MD80 MT - 100	80 m ³ /h	-45°C	3,0/1,5 kW	400V/3+N/50Hz	100 dm ³	3+3 m, D. 50 mm	KSB2
MD80 MT - 150	80 m ³ /h	-45°C	3,0/1,5 kW	400V/3+N/50Hz	150 dm ³	3+3 m, D. 50 mm	KSB2
MD120 MT - 150	120 m ³ /h	-45°C	4,8/1,5 kW	400V/3+N/50Hz	150 dm ³	3+3 m, D. 50 mm	KSB2
MD120 MT - 200	120 m ³ /h	-45°C	4,8/1,5 kW	400V/3+N/50Hz	200 dm ³	3+3 m, D. 50 mm	KSB2

3-02 **Sistema deumidificatore bitorre MD HT (70÷190°C) + tramoggia con base sopra pressa**
System with twin-tower MD HT (70÷190°C) dryer + hopper with base above machine

Modello Model	Portata aria Airflow	Dew Point Dew Point	Proc./Rigen. Risc. Proc./Regen. Heating	Tensione/Frequenza Voltage/Frequency	Volume tramoggia Hopper volume	Diametro tubi aria Air hoses diameter	Base con serranda Base with slide gate
MD80 HT - 50	80 m ³ /h	-45°C	4,8/1,5 kW	400V/3+N/50Hz	50 dm ³	3+3 m, D. 50 mm	KSB1
MD80 HT - 75	80 m ³ /h	-45°C	4,8/1,5 kW	400V/3+N/50Hz	75 dm ³	3+3 m, D. 50 mm	KSB1
MD80 HT - 100	80 m ³ /h	-45°C	4,8/1,5 kW	400V/3+N/50Hz	100 dm ³	3+3 m, D. 50 mm	KSB2
MD80 HT - 150	80 m ³ /h	-45°C	4,8/1,5 kW	400V/3+N/50Hz	150 dm ³	3+3 m, D. 50 mm	KSB2
MD120 HT - 150	120 m ³ /h	-45°C	6,0/1,5 kW	400V/3+N/50Hz	150 dm ³	3+3 m, D. 50 mm	KSB2
MD120 HT - 200	120 m ³ /h	-45°C	6,0/1,5 kW	400V/3+N/50Hz	200 dm ³	3+3 m, D. 50 mm	KSB2

MODELLI SU CARRELLO O TELAIO
FRAME OR TROLLEY-MOUNTED MODELS

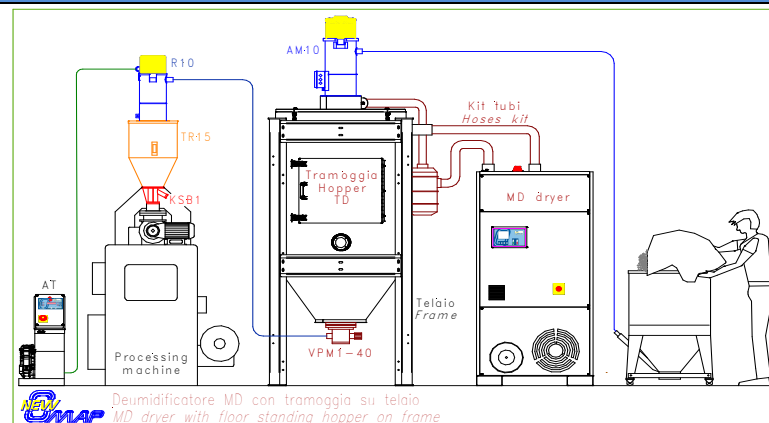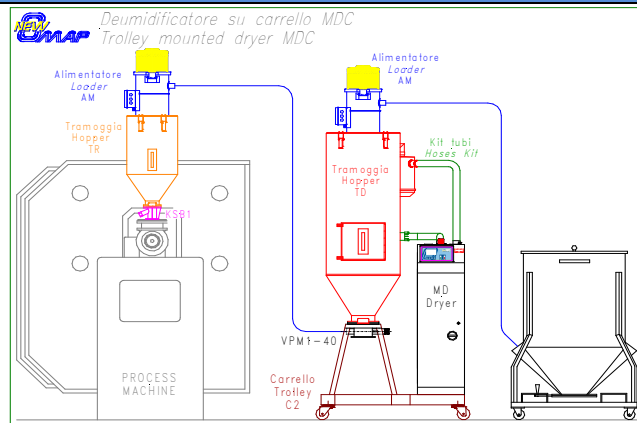

3-03

Deumidificatore bitorre MD MT (70÷150°C) con tramoggia+cassetto aspirazione su carrello o struttura
Twin-tower dryers MD MT (70÷150°C) with hopper+take-off box on trolley or frame

Modello Model	Portata aria Airflow	Proc./Rigen. Risc. Proc./Regen. Heating	Tensione/Frequenza Voltage/Frequency	Volume tramoggia Hopper volume	Diametro tubi aria Air hoses diameter	Carrello o Struttura Trolley or Frame	Cassetto aspirazione Take-off box
MDC80 MT - 50	80 m ³ /h	3,0/1,5 kW	400V/3+N/50Hz	50 dm ³	1+1 m, D. 50 mm	C2	VPM1-40
MDC80 MT - 75	80 m ³ /h	3,0/1,5 kW	400V/3+N/50Hz	75 dm ³	1+1 m, D. 50 mm	C2	VPM1-40
MDC80 MT - 100	80 m ³ /h	3,0/1,5 kW	400V/3+N/50Hz	100 dm ³	1+1 m, D. 50 mm	C2	VPM1-40
MDC80 MT - 150	80 m ³ /h	3,0/1,5 kW	400V/3+N/50Hz	150 dm ³	1+1 m, D. 50 mm	C2	VPM1-40
MDC80 MT - 200	80 m ³ /h	3,0/1,5 kW	400V/3+N/50Hz	200 dm ³	1+1 m, D. 50 mm	C2	VPM1-40
MDC120 MT - 150	120 m ³ /h	4,8/1,5 kW	400V/3+N/50Hz	150 dm ³	1+1 m, D. 50 mm	C2	VPM1-40
MDC120 MT - 200	120 m ³ /h	4,8/1,5 kW	400V/3+N/50Hz	200 dm ³	1+1 m, D. 50 mm	C2	VPM1-40
MDS160 MT - 300	160 m ³ /h	4,8/1,5 kW	400V/3+N/50Hz	300 dm ³	1+1 m, D. 63 mm	S30	VPM1-40
MDS160 MT - 400	160 m ³ /h	4,8/1,5 kW	400V/3+N/50Hz	400 dm ³	1+1 m, D. 63 mm	S40	VPM1-40

3-04

Deumidificatore bitorre MD HT (70÷190°C) con tramoggia+cassetto aspirazione su carrello o struttura
Twin-tower dryers MD HT (70÷190°C) with hopper+take-off box on trolley or frame

Modello Model	Portata aria Airflow	Proc./Rigen. Risc. Proc./Regen. Heating	Tensione/Frequenza Voltage/Frequency	Volume tramoggia Hopper volume	Diametro tubi aria Air hoses diameter	Carrello o Struttura Trolley or Frame	Cassetto aspirazione Take-off box
MDC80 HT - 50	80 m ³ /h	4,8/1,5 kW	400V/3+N/50Hz	50 dm ³	1+1 m, D. 50 mm	C2	VPM1-40
MDC80 HT - 75	80 m ³ /h	4,8/1,5 kW	400V/3+N/50Hz	75 dm ³	1+1 m, D. 50 mm	C2	VPM1-40
MDC80 HT - 100	80 m ³ /h	4,8/1,5 kW	400V/3+N/50Hz	100 dm ³	1+1 m, D. 50 mm	C2	VPM1-40
MDC80 HT - 150	80 m ³ /h	4,8/1,5 kW	400V/3+N/50Hz	150 dm ³	1+1 m, D. 50 mm	C2	VPM1-40
MDC80 HT - 200	80 m ³ /h	4,8/1,5 kW	400V/3+N/50Hz	200 dm ³	1+1 m, D. 50 mm	C2	VPM1-40
MDC120 HT - 150	120 m ³ /h	6,0/1,5 kW	400V/3+N/50Hz	150 dm ³	1+1 m, D. 50 mm	C2	VPM1-40
MDC120 HT - 200	120 m ³ /h	6,0/1,5 kW	400V/3+N/50Hz	200 dm ³	1+1 m, D. 50 mm	C2	VPM1-40
MDC160 HT - 300	160 m ³ /h	6,0/1,5 kW	400V/3+N/50Hz	300 dm ³	1+1 m, D. 63 mm	S30	VPM1-40
MDS160 HT - 400	160 m ³ /h	6,0/1,5 kW	400V/3+N/50Hz	400 dm ³	1+1 m, D. 63 mm	S40	VPM1-40



3-05 Deumidificatore bitorre MD MT (70÷150°C) con tramoggia+cassetto aspirazione su carrello o struttura <i>Twin-tower dryers MD MT (70÷150°C) with hopper+take-off box on trolley or frame</i>								
Modello Model	Portata aria Airflow	Proc./Rigen. Risc. Proc./Regen. Heating	Tensione/Frequenza Voltage/Frequency	Volume tramoggia Hopper volume	Diametro tubi aria Air hoses diameter	Carrello o Struttura Trolley or Frame	Cassetto aspirazione Take-off box	
MDC180 MT - 300	180 m ³ /h	7,2/4,5 kW	400V/3/50Hz	300 dm ³	2+2 m, D. 89 mm	S30	VPM1-40	
MDS180 MT - 400	180 m ³ /h	7,2/4,5 kW	400V/3/50Hz	400 dm ³	2+2 m, D. 89 mm	S40	VPM1-40	
MDS180 MT - 600	180 m ³ /h	7,2/4,5 kW	400V/3/50Hz	600 dm ³	2+2 m, D. 89 mm	S60	VPM1-40	
MDS250 MT - 600	250 m ³ /h	9,6/4,5 kW	400V/3/50Hz	600 dm ³	2+2 m, D. 89 mm	S60	VPM1-40	
MDS250 MT - 800	250 m ³ /h	9,6/4,5 kW	400V/3/50Hz	800 dm ³	2+2 m, D. 89 mm	S80	VPMS2-50	
MDS400 MT - 800	400 m ³ /h	12,0/4,5 kW	400V/3/50Hz	800 dm ³	2+2 m, D. 89 mm	S80	VPMS2-50	

3-06 Deumidificatore bitorre MD HT (70÷190°C) con tramoggia+cassetto aspirazione su carrello o struttura <i>Twin-tower dryers MD HT (70÷190°C) with hopper+take-off box on trolley or frame</i>								
Modello Model	Portata aria Airflow	Proc./Rigen. Risc. Proc./Regen. Heating	Tensione/Frequenza Voltage/Frequency	Volume tramoggia Hopper volume	Diametro tubi aria Air hoses diameter	Carrello o Struttura Trolley or Frame	Cassetto aspirazione Take-off box	
MDC180 HT - 300	180 m ³ /h	9,6/4,5 kW	400V/3/50Hz	300 dm ³	2+2 m, D. 89 mm	S30	VPM1-40	
MDS180 HT - 400	180 m ³ /h	9,6/4,5 kW	400V/3/50Hz	400 dm ³	2+2 m, D. 89 mm	S40	VPM1-40	
MDS180 HT - 600	180 m ³ /h	9,6/4,5 kW	400V/3/50Hz	600 dm ³	2+2 m, D. 89 mm	S60	VPM1-40	
MDS250 HT - 600	250 m ³ /h	12,0/4,5 kW	400V/3/50Hz	600 dm ³	2+2 m, D. 89 mm	S60	VPM1-40	
MDS250 HT - 800	250 m ³ /h	12,0/4,5 kW	400V/3/50Hz	800 dm ³	2+2 m, D. 89 mm	S80	VPMS2-50	
MDS400 HT - 800	400 m ³ /h	15,0/4,5 kW	400V/3/50Hz	800 dm ³	2+2 m, D. 89 mm	S80	VPMS2-50	

3-07 Deumidificatore bitorre MD MT (70÷150°C) con tramoggia+cassetto aspirazione su carrello o struttura <i>Twin-tower dryers MD MT (70÷150°C) with hopper+take-off box on trolley or frame</i>								
Modello Model	Portata aria Airflow	Proc./Rigen. Risc. Proc./Regen. Heating	Tensione/Frequenza Voltage/Frequency	Volume tramoggia Hopper volume	Diametro tubi aria Air hoses diameter	Carrello o Struttura Trolley or Frame	Cassetto aspirazione Take-off box	
MDS400 MT - 1000	400 m ³ /h	12,0/4,5 kW	400V/3/50Hz	1000 dm ³	2+2 m, D. 89 mm	S100	VPMS2-50	
MDS500 MT - 1000	500 m ³ /h	15,0/4,5 kW	400V/3/50Hz	1000 dm ³	2+2 m, D. 89 mm	S100	VPMS2-50	
MDS500 MT - 1500	500 m ³ /h	15,0/4,5 kW	400V/3/50Hz	1500 dm ³	2+2 m, D. 89 mm	S150	VPMS2-50	
MDS650 MT - 1500	650 m ³ /h	18,0/15,0 kW	400V/3/50Hz	1500 dm ³	2+2 m, D. 114 mm	S150	VPMS2-50	
MDS650 MT - 2000	650 m ³ /h	18,0/15,0 kW	400V/3/50Hz	2000 dm ³	2+2 m, D. 114 mm	S200	VPMS2-50	
MDS850 MT - 2500	850 m ³ /h	22,5/15,0 kW	400V/3/50Hz	2000 dm ³	2+2 m, D. 114 mm	S250	VPMS2-50	
MDS850 MT - 3000	850 m ³ /h	22,5/15,0 kW	400V/3/50Hz	2000 dm ³	2+2 m, D. 114 mm	S300	VPMS2-50	

3-08 Deumidificatore bitorre MD HT (70÷190°C) con tramoggia+cassetto aspirazione su carrello o struttura <i>Twin-tower dryers MD HT (70÷190°C) with hopper+take-off box on trolley or frame</i>								
Modello Model	Portata aria Airflow	Proc./Rigen. Risc. Proc./Regen. Heating	Tensione/Frequenza Voltage/Frequency	Volume tramoggia Hopper volume	Diametro tubi aria Air hoses diameter	Carrello o Struttura Trolley or Frame	Cassetto aspirazione Take-off box	
MDS400 HT - 1000	400 m ³ /h	15,0/4,5 kW	400V/3/50Hz	1000 dm ³	2+2 m, D. 89 mm	S100	VPMS2-50	
MDS500 HT - 1000	500 m ³ /h	18,0/4,5 kW	400V/3/50Hz	1000 dm ³	2+2 m, D. 89 mm	S100	VPMS2-50	
MDS500 HT - 1500	500 m ³ /h	18,0/4,5 kW	400V/3/50Hz	1500 dm ³	2+2 m, D. 89 mm	S150	VPMS2-50	
MDS650 HT - 1500	650 m ³ /h	30,0/15,0 kW	400V/3/50Hz	1500 dm ³	2+2 m, D. 114 mm	S150	VPMS2-50	
MDS650 HT - 2000	650 m ³ /h	30,0/15,0 kW	400V/3/50Hz	2000 dm ³	2+2 m, D. 114 mm	S200	VPMS2-50	
MDS850 HT - 2500	850 m ³ /h	42,0/15,0 kW	400V/3/50Hz	2000 dm ³	2+2 m, D. 114 mm	S250	VPMS2-50	
MDS850 HT - 3000	850 m ³ /h	42,0/15,0 kW	400V/3/50Hz	2000 dm ³	2+2 m, D. 114 mm	S300	VPMS2-50	

